


# Anytime Anywhere Sleep Therapy

NiteOwl, an industrial-grade, rechargeable lithium-ion battery, is designed to power the most common PAP devices. So, wherever life takes you, you can bring your sleep therapy along for the adventure.



**Rest assured with NiteOwl,  
your companion for anytime  
anywhere sleep therapy.**

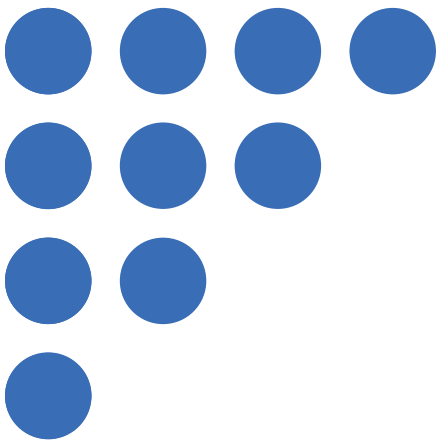

- NEW Swappable cell pack design for limitless power
- 50% larger cell pack. Now offering 150Wh's of power.
- Powers your CPAP machine for 2-3 nights\*
- Compatible with ResMed's AirSense 10 and 11, and AirMini; React Health's Luna G3 and Luna Travel PAP; Philips Respironics' DreamStation 1 and 2, and System One 60 Series. Contact us for other device information.
- Use your CPAP's AC power supply to charge the NiteOwl—no need to carry an additional power supply
- FAA-approved for use on board aircraft
- Seamless use as an uninterrupted battery backup
- Quick-charge 3.0 USB port charges portable electronics

\*With the heated humidifier off. Runtimes depend on several factors including device type, pressure setting, mask fit, etc.

## Where to Purchase Your NiteOwl Sleep Therapy Companion

Ask about NiteOwl at your local sleep therapy equipment provider, or contact us. We can help you find a retailer in your area.



**866-718-0557**




**[sleepniteowl@gmail.com](mailto:sleepniteowl@gmail.com)**



**[www.niteowlcpapbattery.com](http://www.niteowlcpapbattery.com)**

**Airline Travel  
Battery Backup  
Camping**



## SPECIFICATIONS

**Cell Type:** Rechargeable Lithium-ion **Casing:**

Aluminum alloy

**Capacity:** 150Wh

**Output Voltage:** 12V-24V DC

(depending on DC output cable)

**Output Current:** 8A (maximum)

**DC Input Voltage Range:** 10V-28V

**Quick-charge 3.0 USB Output Voltage:**

5V | 2.4A (maximum)

**Charge Input:** 10V-28V

**Optimal Charging Conditions:** 32°F to 104°F

**Optimal Operating Conditions:** 23°F to 104°F

\*battery capacity is reduced by 30% when operating between 23°F to 32°F

**Charge Time:** 2-3 hrs @ 90W

\*charge times are per battery and using the ResMed Air 10 AC power supply

**Power Gauge:** Digital Display Screen  
(shows charge level as a percentage)

**Storage Conditions:** -4°F to 104°F  
(optimal range: 60°F to 80°F)

**Life Span:** 500 charge/discharge cycles  
(100%-0% then back to 100%)

\*After 500 cycles the battery shall recover at least 70% of its initial charge

**Warranty:** 1 year



## NEVER GO WITHOUT POWER

### Quick Swap Cell Pack Design

Detachable cell pack and interface design allows for easily switching out cell packs on the go for limitless power to your CPAP device.

### Get Nonstop Sleep Therapy

NiteOwl can be set up as a battery backup and will automatically turn on if power is lost, allowing your therapy to continue uninterrupted.

### Stay on the Move

We offer optional add-ons such as a DC Cable/Car Charger for quick and easy charging on the go. You can also pair NiteOwl with many other portable and solar solutions available on the market. Simply check the battery input specifications.



## ON-THE-GO SLEEP THERAPY

### Fly Away With NiteOwl

NiteOwl meets all current FAA requirements, making it safe to use on board—perfect for international and red-eye flights.

### Roam the Great Outdoors

Great for camping and road trips—with up to 3 nights\* of power available on a single NiteOwl, you can bring your sleep therapy with you, even if you are roughing it.



\*Many factors impact runtimes. The type of device, pressure settings, altitude, and more can greatly affect how long you can power your PAP device.

